

26
kW

POWERPROTECT
Standby Generators



YOU.POWERED.

RESIDENTIAL Standby Generators



SPECIFICATIONS

OVERVIEW		
Brand	Briggs & Stratton	
Series Name	Power Protect™	
Model Name	PP26	PPDX26
Model Number	040658	040664
Rated AC Voltage (Volts)	120/240	
Frequency (Hz)	60	
Generator Breaker (Amps)	125	
Operating Ambient Temperature °F (°C)	-20 - 104 (-28 - 40)	
Running Amperage, Standby (LP / NG) (Amps)	108.3 / 100	
Running Watts, Standby (LP / NG) (kW)	26' / 24	
Power Factor	1.0	
Exercise Duration	16 seconds	
Engine		
Engine Brand/Manufacturer	Vanguard	
Model Type	M61	
Aspiration	Naturally Aspirated	
Speed (RPM)	3600	
Displacement (ci/cc)	61 / 993	
Compression Ratio	9.7:1	
Governor Type	Electronic	

26

kW

POWERPROTECT

Standby Generators

RESIDENTIAL STANDBY GENERATORS SPECIFICATIONS



040658

040664

Engine	
Bore & Stroke (mm / in)	85.5 x 86.5 / 3.37 x 3.41
Cylinder Block	Aluminum with Cast Iron Sleeve
Valve Arrangement	OHV
Engine Cylinder Configuration	V
Number of Cylinders	2
Start Type	Automatic
Frequency Regulation Steady State, No Load to Full Load (%)	+/- 1.0
Air Filter Type	Dry
Low Oil Pressure Switch	Yes
Engine Oil Heater	Optional
Rated Temp (°C / °F)	25 / 77
Sound Rating ²	
Low Idle Mode Sound dB(A)	63
Normal Operating Sound ² dB(A)	65
Lubrication System	
Type	Full Pressure
Oil Capacity (oz / L)	78 / 2.31
Oil Filter (Quantity / Type)	1 / Cartridge
Oil Brand	Schaeffer
Recommended Oil	5W30 Full Synthetic
Electrical System	
Ignition System	Variable Timing
Battery Quantity	1
Battery Voltage (VDC)	12
Battery CCA (Amps)	540
Battery Grouping Size	26 or 51
Starter Motor Voltage (VDC)	12
Fuel System	
Fuel Type	NG / LPV
Fuel Supply Line Inlet	3/4" NPT
Recommended Fuel, Lower Heating Value Minimum (MJ/m ³ / BTU/ft ³)	NG: 34.3 / 904 LPV: 87.1 / 2338
Fuel Supply Pressure (mbar / in H ₂ O)	NG: 9-17 / 3.5-7 LPV: 28-34 / 11-14

26

kW

POWERPROTECT

Standby Generators

RESIDENTIAL STANDBY GENERATORS SPECIFICATIONS



040658

040664

Fuel Consumption ³	
No Load, NG (BTU/hr)	122,000
No Load, NG (f ³ /hr)	122
1/2 Load, NG (BTU/hr)	206,000
1/2 Load, NG (f ³ /hr)	206
Full Load, NG (BTU/hr)	323,000
Full Load, NG (f ³ /hr)	323
No Load, LP (BTU/hr)	123,000
No Load, LP (f ³ /hr)	49
1/2 Load, LP (BTU/hr)	235,000
1/2 Load, LP (f ³ /hr)	94
Full Load, LP (BTU/hr)	427,000
Full Load, LP (f ³ /hr)	171
Alternator Specifications	
Alternator Type	Self-Excited, Rotating Field
Alternator Manufacturer	Briggs & Stratton
Frequency (Hz)	60
Phase	1
Insulation Rating (Class)	H
Designed Temperature Rise	125
Bearing (Quantity / Type)	1 / Sealed
Number of Poles	2
Voltage Regulator	Brushed / Electronic
Motor Starting Capability kVA	41 (13% Voltage Dip)
Total Harmonic Distortion (THD), NL to FL (%)	< 5
Controls/Instrumentation	
Controller	GC-1032
Charger	Stand Alone
Starting	AMF or 2-wire
LED Digital Display	Yes
Alternator Frequency	Yes
Real Time Clock	Yes
Engine Hour Counter	Yes
Engine Runtime Scheduler	Yes

26

kW

POWERPROTECT

Standby Generators

RESIDENTIAL STANDBY GENERATORS SPECIFICATIONS



040658

040664

Controls/Instrumentation	
Low Oil Pressure Shutdown	Yes
High Temperature Shutdown	Yes
Fault Code Display	Yes
Other Features	
Battery Rack and Cables	Yes
Electronic, Isochronous Governor	No
Fuel Solenoid Valve	Yes
Integral Vibration Isolation	Yes
Oil Drain Extension	Yes
Operation and Installation Manual(s)	Yes
Enclosure	Aluminum
Wind Speed Rating (mph)	186
Accessories	
Maintenance Kit	6872
Oil Warmer	6840
Fuel Regulator Warmer	6845
Surge Protector	6631
Amplify Gateway	6520
UPS	6581
InfoHub™ Universal - Cellular	6574
Gateway Range Extender	6839
Warranty ⁴	
Warranty: Generator, Domestic & Canada (Parts / Labor / Travel) – Years	6 10
Warranty: Generator, International (Parts / Labor / Travel) – Years/Hours	3 / 1000
Warranty: Enclosure, Surface Rust and Corrosion (Parts / Labor / Travel) – Years	1
Warranty: Enclosure, Rust Through (Parts / Labor / Travel) – Years	3
Certifications	
UL	Yes
cUL	Yes
CE	No
Massachusetts Plumbers and Gasfitters Listing	Yes

26

kW

POWERPROTECT

Standby Generators


RESIDENTIAL STANDBY GENERATORS SPECIFICATIONS




040658

040664

Weights & Dimensions	
Assembled Dimensions (Length x Width x Height) (in / mm)	46.5 x 26.8 x 28.4 / 1181 x 681 x 721
Assembled Weight (lbs / kg)	540 / 245
Packaged Dimensions (Length x Width x Height) (in / mm)	48.8 x 30.5 x 50.5 / 1240 x 775 x 1283
Packaged Weight (lbs / kg)	625 / 285
Outline and Pad Layout Drawing	80104089

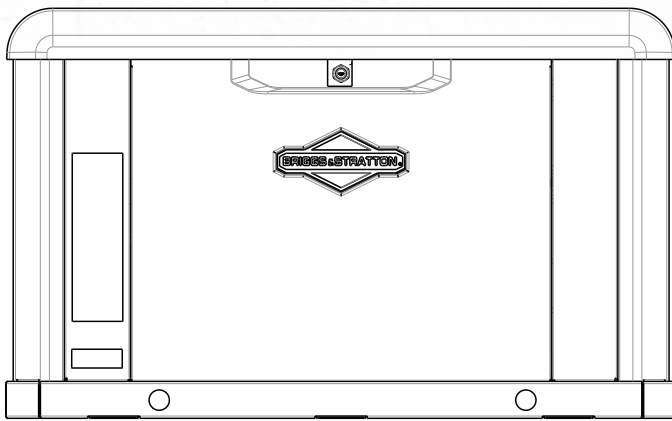

46.5 in (1181 mm)

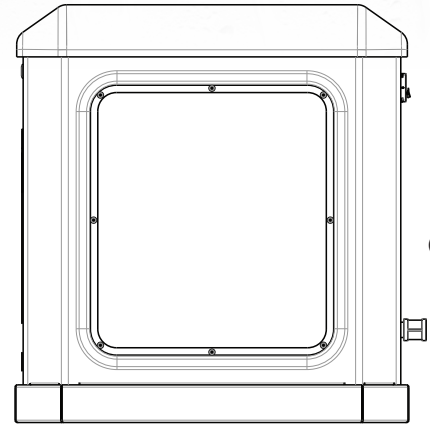

28.4 in (725 mm)

26.8 in (681 mm)



¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

² Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.

³ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances — fuel flow rates may vary depending on these factors.

⁴ See operator's manual or BRIGGSandSTRATTON.com for complete warranty details.

Sound Pressure per ISO 3744. Lowest mic at 7 meters (23 feet) at indicated load.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

This standby generator is not for Prime Power applications.

Published June 2021. Please visit BRIGGSandSTRATTON.com for the latest information.

BS1306 - 6/21

BRIGGS & STRATTON
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA

Copyright © 2021 Briggs & Stratton. All rights reserved.